


# Bulk Current Injection Probe



The F-070601-1008-1 is used for BCI testing in accordance with automotive specifications like ISO 11452-4 as well as diagnostic bulk current testing up to 1.0 GHz. The useable frequency range is 400 MHz to 1.0 GHz with a typical insertion loss of 7 dB or less from 400 MHz to 1 GHz. The CW input power rating is 500 watts for a duration of 30 minutes.

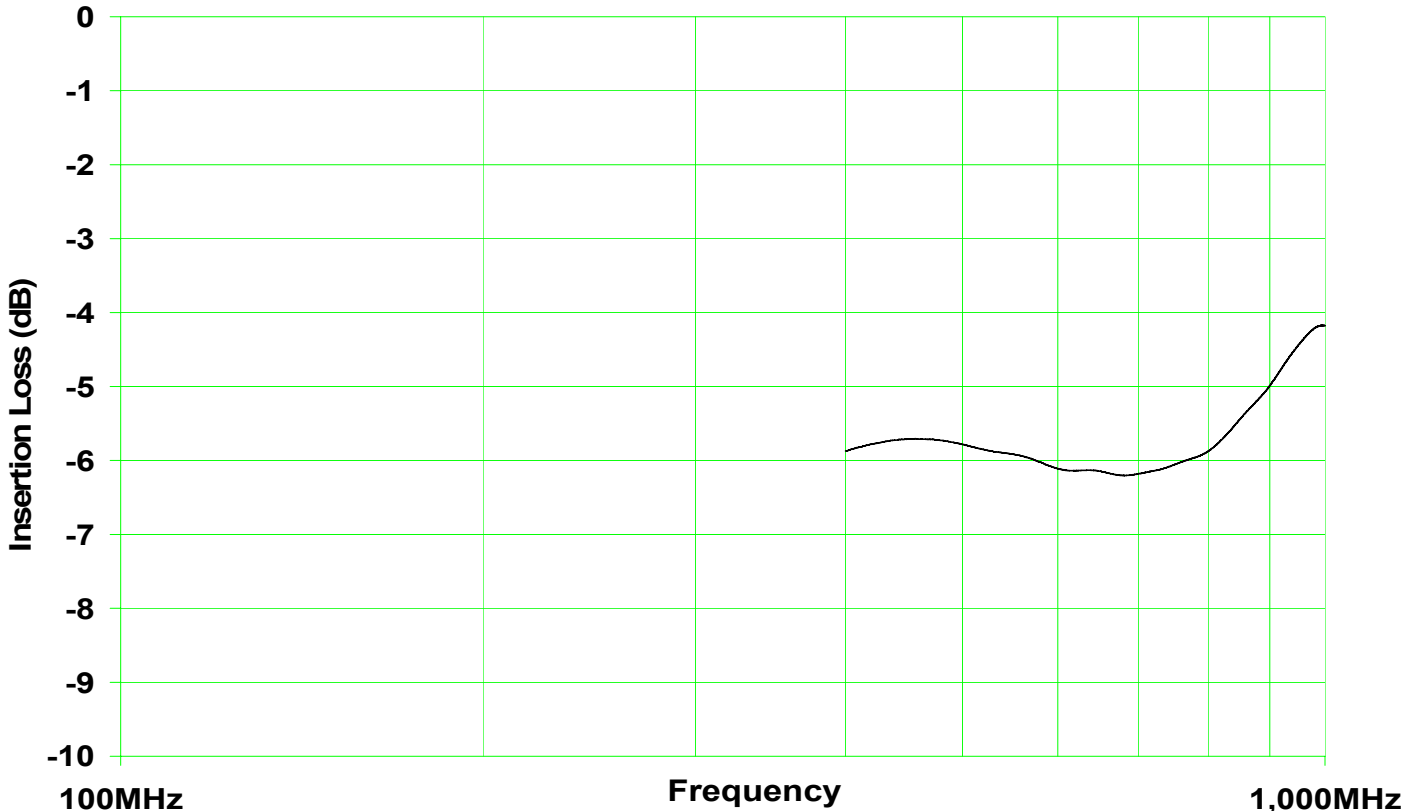

## [F-070601-1008-1 Specifications](#)

Frequency: 400 MHz – 1 GHz  
Inner Diameter: 40mm  
Outer diameter: 127mm  
Height: 70mm  
Input Power rating: 500 watts

## [Accessories](#)

Calibration Fixture: F-070601-1008-2  
Bandwidth: 400 MHz – 1 GHz  
Current Probe: F-61  
Bandwidth: 1 MHz – 1 GHz



**Fischer Custom Communications, Inc.**

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: sales@fischercc.com

© Fischer Custom Communications, Inc.

All rights reserved • Printed in USA

0208DS-F-070601-1008-1

F-070601-1008-1