


Bulk Current Injection Probe



The F-140 is used for BCI testing in accordance with automotive specifications like SAE J15447 as well as diagnostic bulk current injection testing up to 1300 MHz. The useable frequency range is 100 kHz – 1300 MHz with an insertion loss of less than 7 dB from 700 kHz to 500 Mhz. The input power rating is 100 watts for 30 minutes.

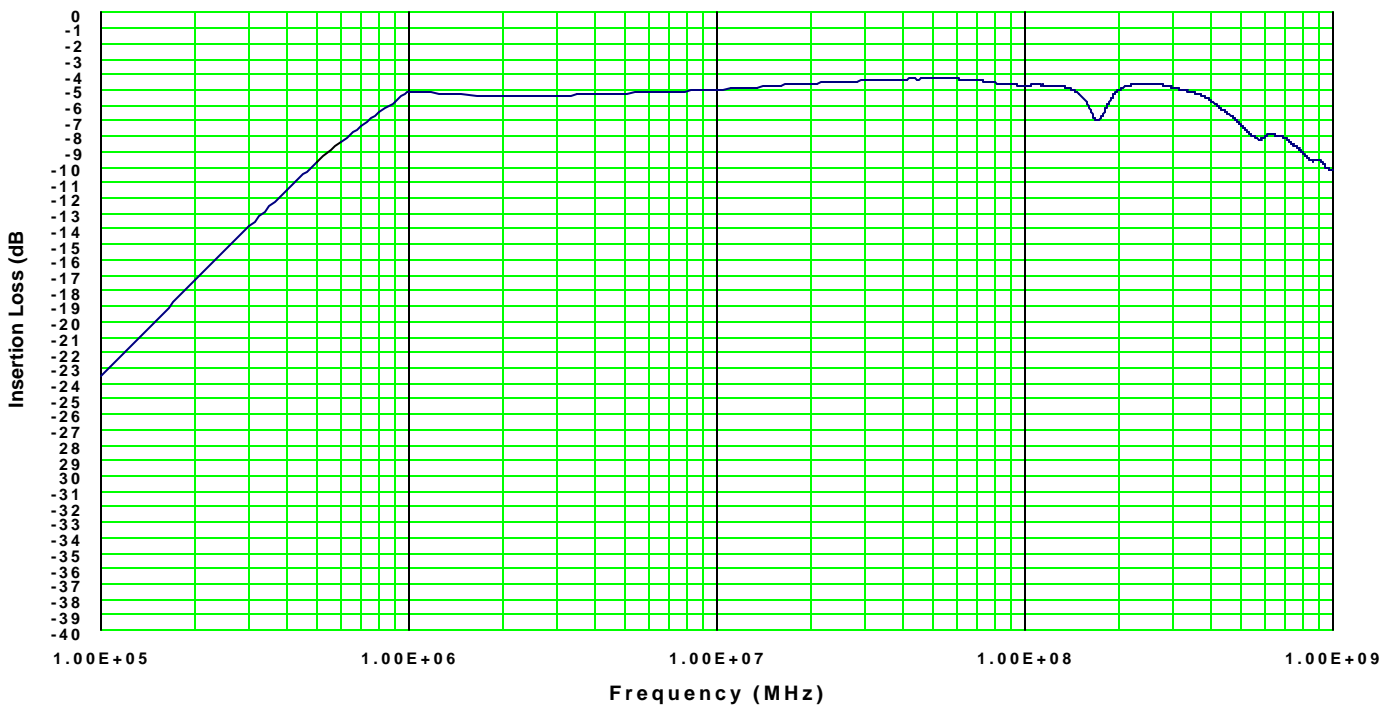

F - 1 4 0

F-140 Specifications

Frequency: 100 kHz – 1 GHz
Inner Diameter: 40mm
Outer diameter: 127mm
Height: 70mm
Input Power rating: 100 watts

Accessories

FCC-BCICF-2 • Calibration Fixture
Bandwidth: 100 kHz – 1 GHz
F-61 • Current Probe
Bandwidth: 1 MHz – 1 GHz



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503 • Phone: 310-303-3300 Fax 310-371-6268 • email: Sales@fischercc.com

© Fischer Custom Communications, Inc.

All rights reserved • Printed in USA

0208DS-F-140