


# Bulk Current Injection Probe



The F-120-3B is primarily suited to low frequency conducted susceptibility testing of signal and power circuits up to 32mm in diameter. The useable frequency range is 10 kHz – 100 MHz, with an insertion loss of less than 10dB from 350kHz – 40 MHz. The input power rating is 50 watts CW for a duration of 15 minutes.

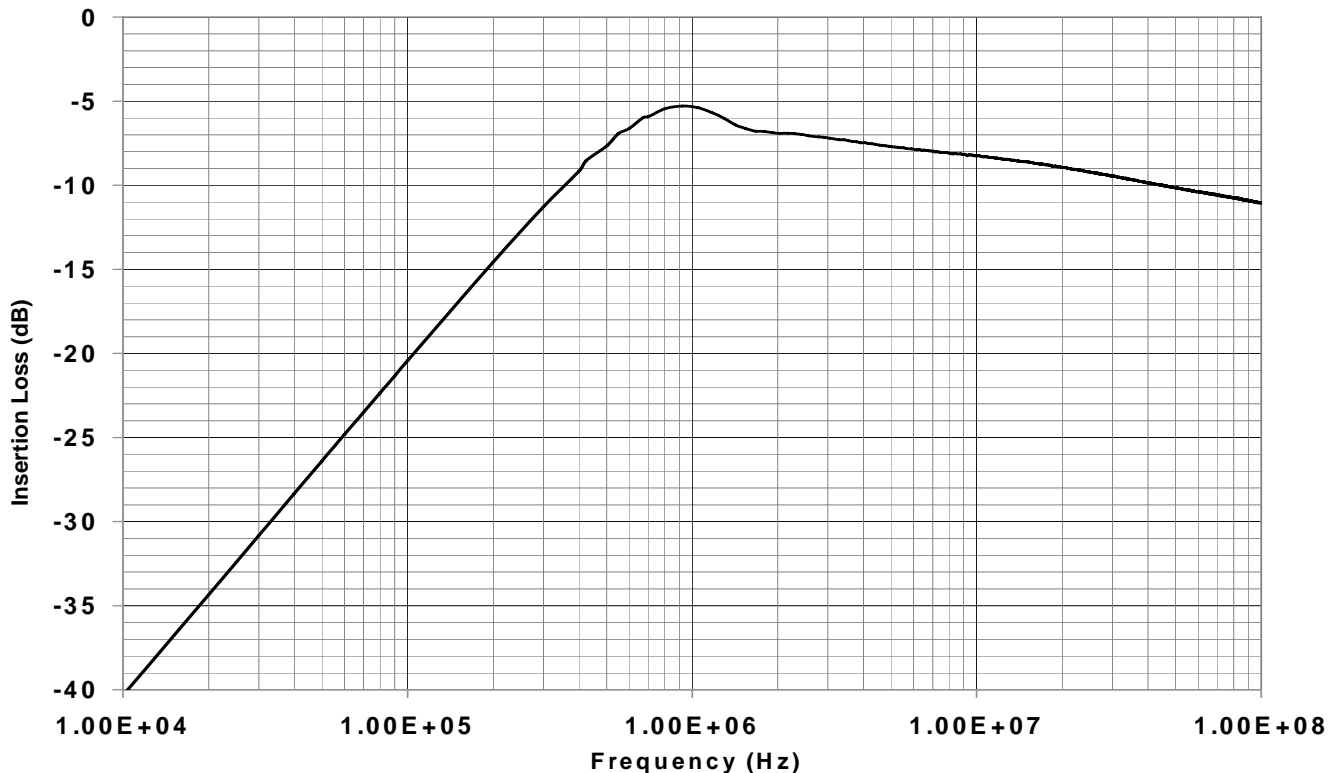

## F-120-3B Specifications

Frequency: 10 kHz – 230 MHz  
Inner Diameter: 32 mm  
Outer diameter: 94 mm  
Height: 64 mm  
Input Power rating: 50 watts

## Accessories

Calibration Fixture: FCC-BCICF-1  
Bandwidth: 10 kHz – 400 MHz  
Current Probe: F-52  
Bandwidth: 10 kHz – 400 MHz



**Fischer Custom Communications, Inc.**

20603 Earl St., Torrance, CA 90503 · Phone: 310-303-3300 Fax 310-371-6268 · email: Sales@fischercc.com

© Fischer Custom Communications, Inc.

All rights reserved • Printed in USA

072803DS-F-120-3B

F-120-3B