



Designers, Developers & Manufacturers
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection
Devices

Calibration
Services

Product Updates

Contact Us


About FCC

Application
Notes

BACK TO BULK CURRENT INJECTION PROBE MASTER GUIDE

F-120-9

The F-120-9 is a high efficiency broad band injection probe. The useable frequency range is 10 KHz to 230 MHz, with less than 10 dB of insertion loss between 120 KHz and 230 MHz. As a result the F-120-9 is ideally suited for use in conducted susceptibility testing, in accord with IEC 801.6 / 1000-4-6, Bulk Current Injection Method. The input power rating of the probe is 100 watts for 30 minutes.

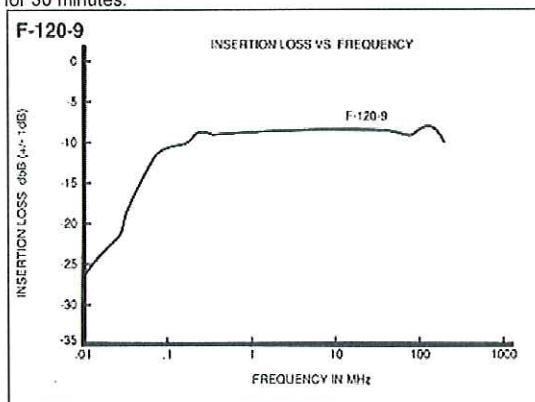

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268
E-mail: sales@fischercc.com