



Designers, Developers & Manufacturers
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection
Devices

Calibration
Services

Product Updates

Contact Us


About FCC

Application
Notes

BACK TO MONITOR CURRENT PROBES MASTER LIST

F-36-4 Current Probe

The F-36-4 is usable from 1 -1000 MHz with a transfer impedance of 22Ω (± 3 dB) from 30 - 1000 MHz. It can operate without saturation from 1 amp CW and 10 amps peak pulse.

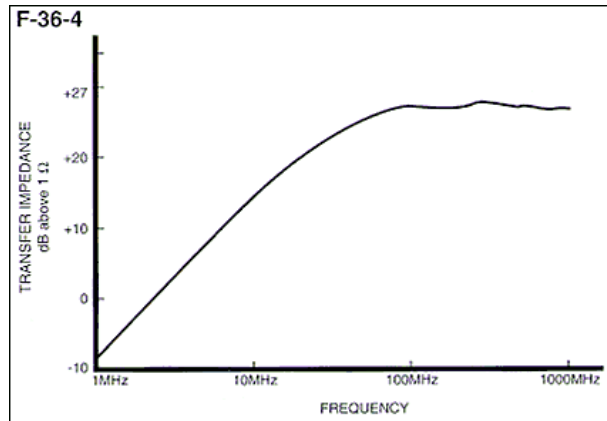

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268
E-mail: sales@fischercc.com