



Designers, Developers & Manufacturers
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection
Devices

Calibration
Services

Product Updates

Contact Us


About FCC

Application
Notes

BACK TO MONITOR CURRENT PROBES MASTER LIST

F-50 Current Probe

The F-50 is usable from 100 kHz to 500 MHz with a typical transfer impedance of 9Ω (± 2 dB) from 50 MHz to 400 MHz. It can operate without saturation from 300 amperes of DC to 400 Hz, 50 amperes of pulse current and 20 amperes of CW.

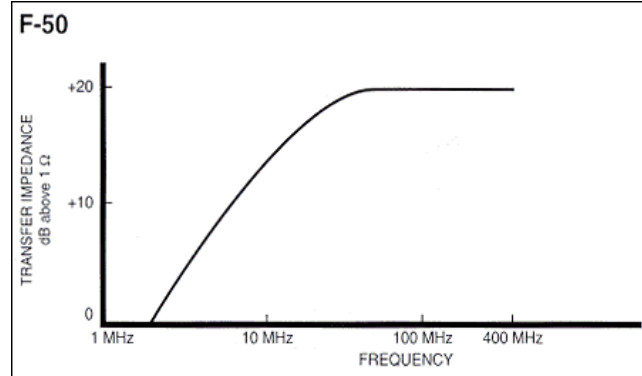

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268
E-mail: sales@fischercc.com