



Designers, Developers & Manufacturers  
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection  
Devices

Calibration  
Services

Product Updates

Contact Us


About FCC

Application  
Notes

## BACK TO MONITOR CURRENT PROBES MASTER LIST

### F-51 Current Probe

The F-51 is usable from 10 kHz to 500 MHz. Its transfer impedance is typically  $10\Omega$  ( $\pm 2$  dB) from 10 MHz to 500 MHz. It will not saturate up to 350 amperes of DC to 400 Hz, 100 amperes of pulse currents and 50 amperes of CW.

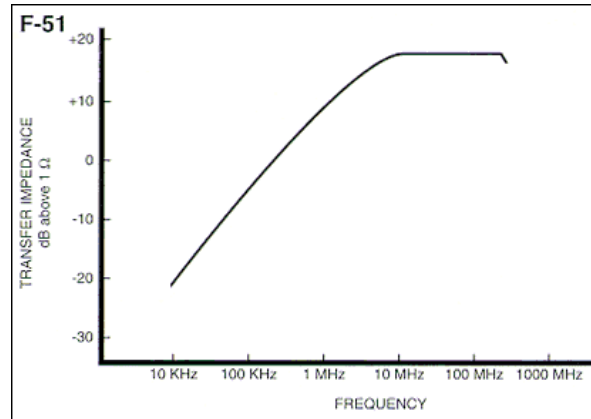

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved  
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268  
E-mail: sales@fischercc.com