



Designers, Developers & Manufacturers  
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection  
Devices

Calibration  
Services

Product Updates

Contact Us


About FCC

Application  
Notes

## BACK TO MONITOR CURRENT PROBES MASTER LIST

### F-71 Current Probe

The F-71 is ideally suited to measuring currents for the immunity requirements of DO-160 and IEC-1000-4-6 on large cables. It has a usable frequency range of 10 kHz to 500 MHz. Its transfer impedance is typically  $8 \Omega$  ( $\pm 2$  dB) from 70 MHz to 400 MHz. It has an aperture of 69.85 mm and can clamp around very large cable bundles. It can operate without saturation from 200 amperes of DC to 400 Hz, 50 amperes of pulse current and 25 amperes of CW.

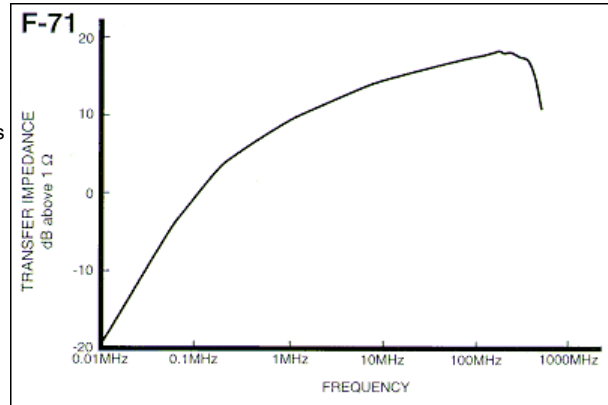

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved  
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268  
E-mail: sales@fischercc.com