



Designers, Developers & Manufacturers  
of Transient Protection Devices and RF Test Equipment

FISCHER CUSTOM COMMUNICATIONS, INC.

Instrumentation

Transient Protection  
Devices

Calibration  
Services

Product Updates

Contact Us


About FCC

Application  
Notes

## BACK TO MONITOR CURRENT PROBES MASTER LIST

### F-73 Current Probe

The F-73 monitor probe can be used from 10 Hz to 30 MHz and has a typical transfer impedance of  $2\Omega$  ( $\pm 3$  dB) from 10 kHz to 30 MHz. It can operate without saturation from 350 amps primary current at 400 Hz and 200 amps CW. The F-73 is particularly useful in making conducted emissions measurements on high amperage powerline cables.

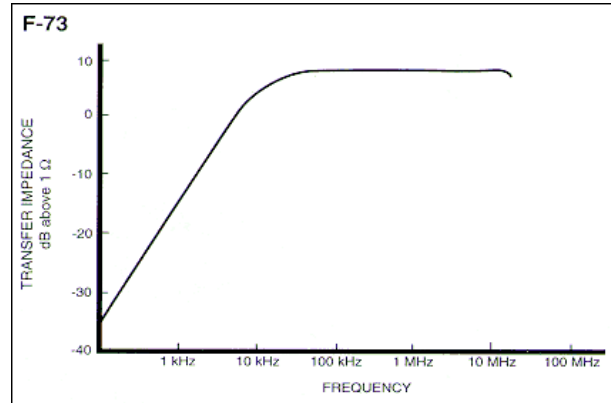

© 2004 Copyright FISCHER CUSTOM COMMUNICATIONS, INC. All rights reserved  
20603 Earl Street • Torrance, CA 90503 • Tel: (310) 303-3300 • Fax: (310) 371-6268  
E-mail: sales@fischercc.com