
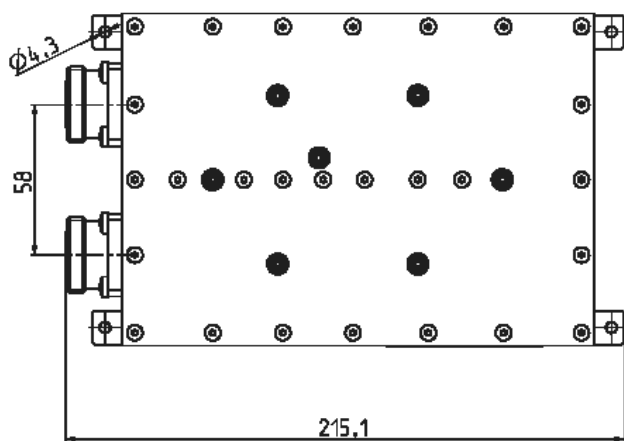
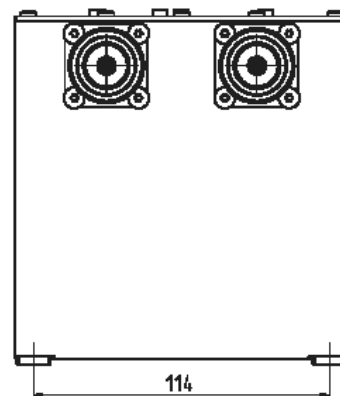


Bandpass

422 – 430 MHz

The bandpass filter A169160 is specially designed for additional suppression of Intermodulation products. It is attached between High-power-amplifier (transmitter-combiner) and duplexer A169100 (Tx).

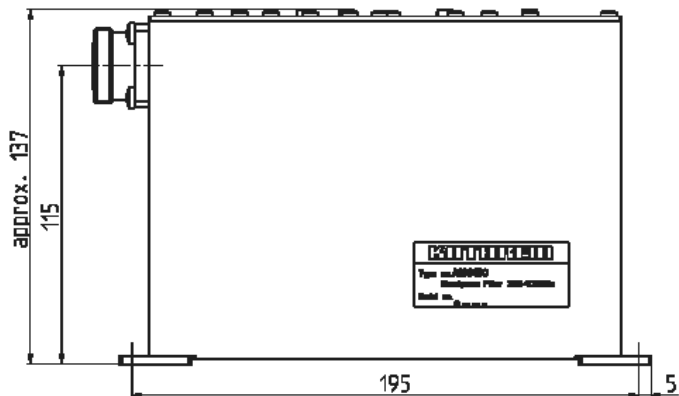

Technical Data:

Type No.		A 169160	
Frequency range:	422...430 MHz	Impedance:	50 Ω
Return loss:	> 20 dB; typical 22 dB	Connectors:	7/16 female
VSWR:	< 1.22	Application:	indoor
Insertion loss:	< 0.7 dB; typical 0.65 dB	Temperature rang:	room temperature
Isolation:	> 55 dB / 410...418 MHz	Dimensions (mm):	s. above
		Weight:	3.8 kg