


# Bandpass

380 – 388 MHz

The bandpass filter A169120 is specially designed for additional suppression of TX carriers. It is attached to duplexer A169090 ( Rx ).

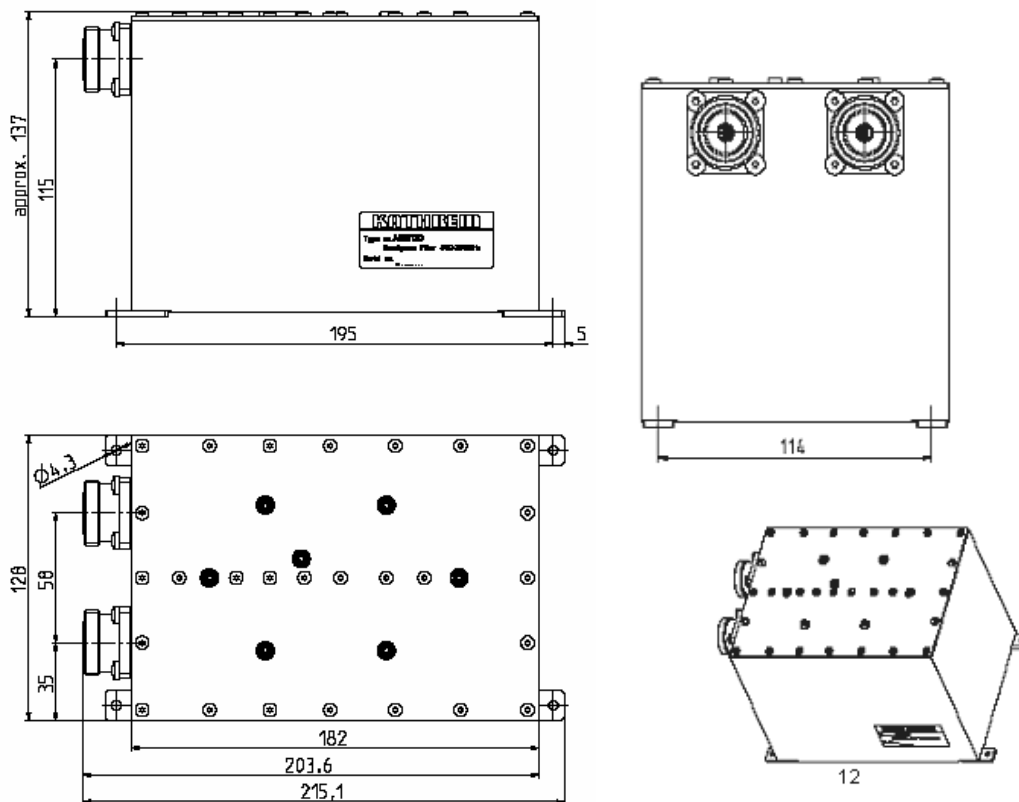

### Technical Data:

Type No.	A 169120	
Frequency range:	380...388 MHz	Impedance: 50 Ω
Return loss:	> 20 dB; typical 22 dB	Connectors: 7/16 female
VSWR:	< 1.22	Application: indoor
Insertion loss:	< 0.7 dB; typical 0.65 dB	Temperature rang: room temperature
Isolation:	> 55 dB / 392...400 MHz	Dimensions (mm): s. above
		Weight: 3.8 kg